

ENGINEERING SUBMITTAL DATA SHEET

C191.0 SUPER CASCADE 9 bottom entry, double-glass residential electric water heaters


152E MODELS




40.5 imperial gallons / 184 litres insulated with 2" eco-friendly GREENFOAM

All models meet or exceed RNCan energy efficiency requirements

Models	Storage Imp. gal.	Capacity Litres	Input	Voltage	Standby loss	Diameter (A)	Height (B)	C In. (cm)	D	E	Plumbing connections	Est. ship. wt.
152E-1F8M	40.5	184	1,500 W	120 V	66 W	22 (56)	481/8 (122)	2½ (6)	45°	45°	3/4" NPT	140 (63)
152E-2F8M	40.5	184	3,000 W	208 V	66 W	22 (56)	481/8 (122)	2½ (6)	45°	45°	3/4" NPT	140 (63)
152E-3F8M	40.5	184	3,000 W	240 V	66 W	22 (56)	481/8 (122)	2½ (6)	45°	45°	3/4" NPT	140 (63)



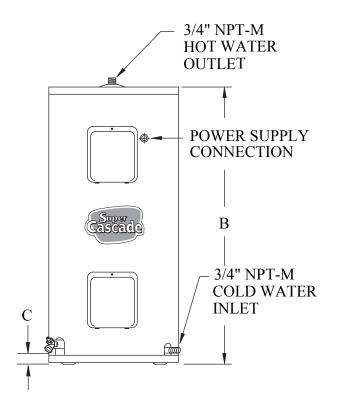

JOB TITLE	SUBMITTED DATE	SUBMITTED DATE					
ADDRESS	REQUIRED PRODUCT	REQUIRED PRODUCT					
	MODEL NO.	SIZE	QUANTITY				
CONTRACTOR	MODEL NO.	SIZE	QUANTITY				
ADDRESS	MODEL NO.	SIZE	QUANTITY				
	MODEL NO.	SIZE	QUANTITY				
ENGINEER	REQUIRED DATE	REQUIRED DATE					

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com

